
P.C.C. DRIVE APPROACH Type III

FOR MEDIUM VOLUME COMMERCIAL USE



- 1. Class 520-C-2500 (5-1/2 sack) P.C.C. with Type I (clear) curing compound shall be used.
- 2. Round all edges with 3/4" radius.
- 3. Saw cutting required on all removals.
- 4. Finish sidewalk with fine broom drawn perpendicular to curb.
- 5. Finish approach with coarse broom drawn parallel to curb.
- 6. Weakened Plane Joints (WPJ) shall have aggregate parted to a depth of 2" with a straight edge prior to installation of 1" "T" shaped strip with removable stiffener and or joint finishing.
- 7. Finish gutter adjacent to curb face with 3" wide smooth flowline (shiner).

Note: Use of this Standard requires recommendation by City of Glendora staff and shall be used as approved by the City Engineer.

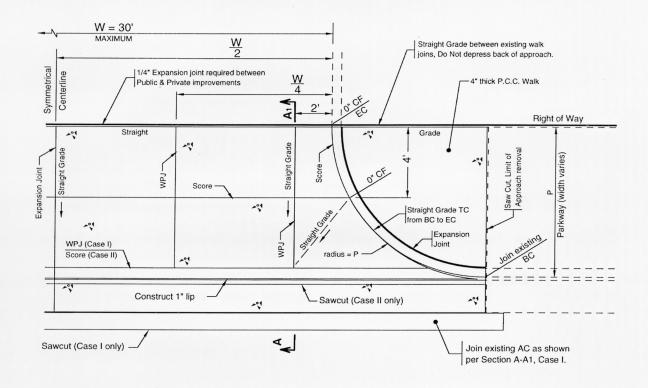



City of Glendora

Public Works Department

STANDARD DESIGNS & SPECIFICATIONS

Adopted for use on Public and Private Improvements

S.D.& S. NO.

1.15

Page 1 of 2